


Topological Study on the Design of Soft Strain Sensors for Simultaneous Multi-point Contact Localization

Leone Costi, Thomas George Thuruthel, Fumiya Iida

Bio-Inspired Robotics Lab, University of Cambridge



Methodology

The fundamental idea of this study is to add diagonal grids of variable orientation on top of the standard architecture. Starting from the classic square architecture with only horizontal and vertical fibers, diagonal grids of different orientations can be added (i.e. three different possible orientations are shown).

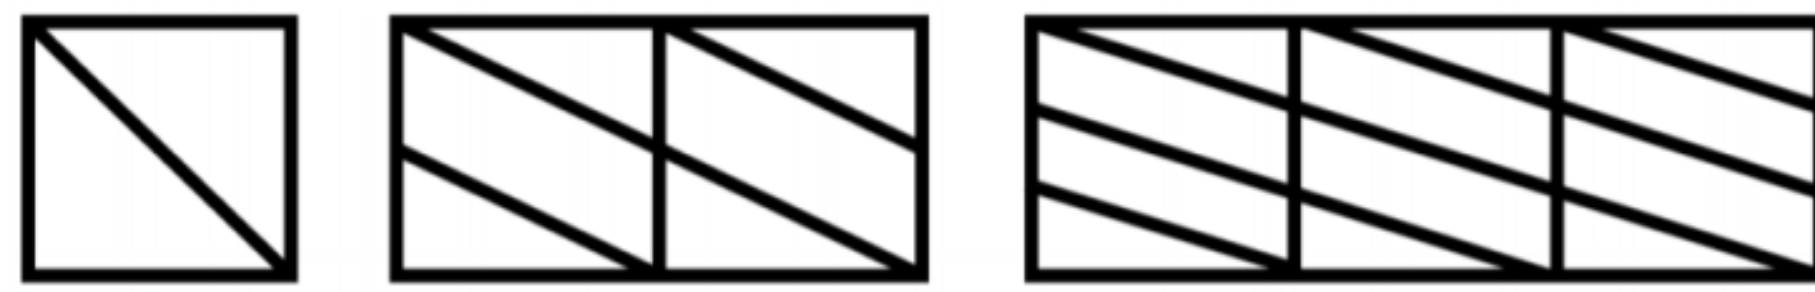

Any architecture is then evaluated by considering two metrics: the maximum number of simultaneously detectable points P_{max} and the size of its limit grid.

When compared with the ideal solution of *one wire per node*, our methodology is shown to be more efficient in terms of needed wires for any fixed number of maximum detectable points.

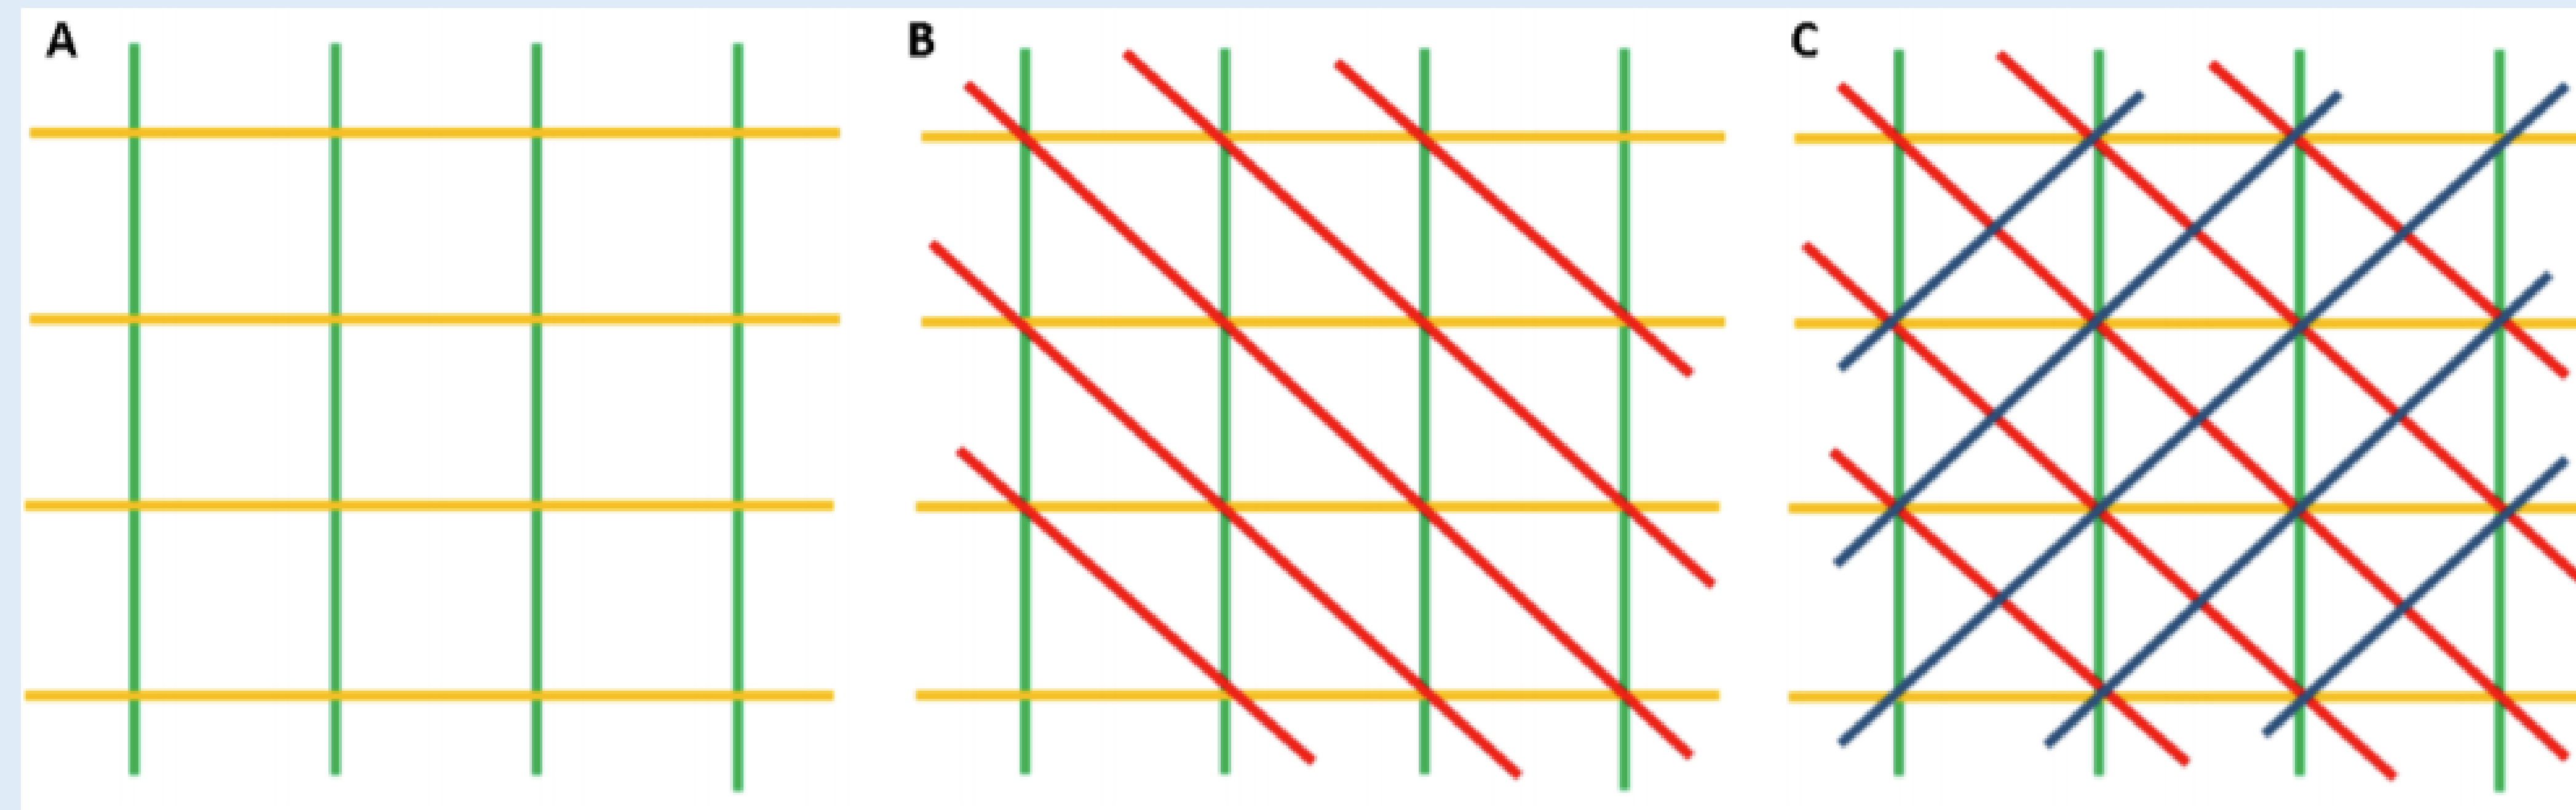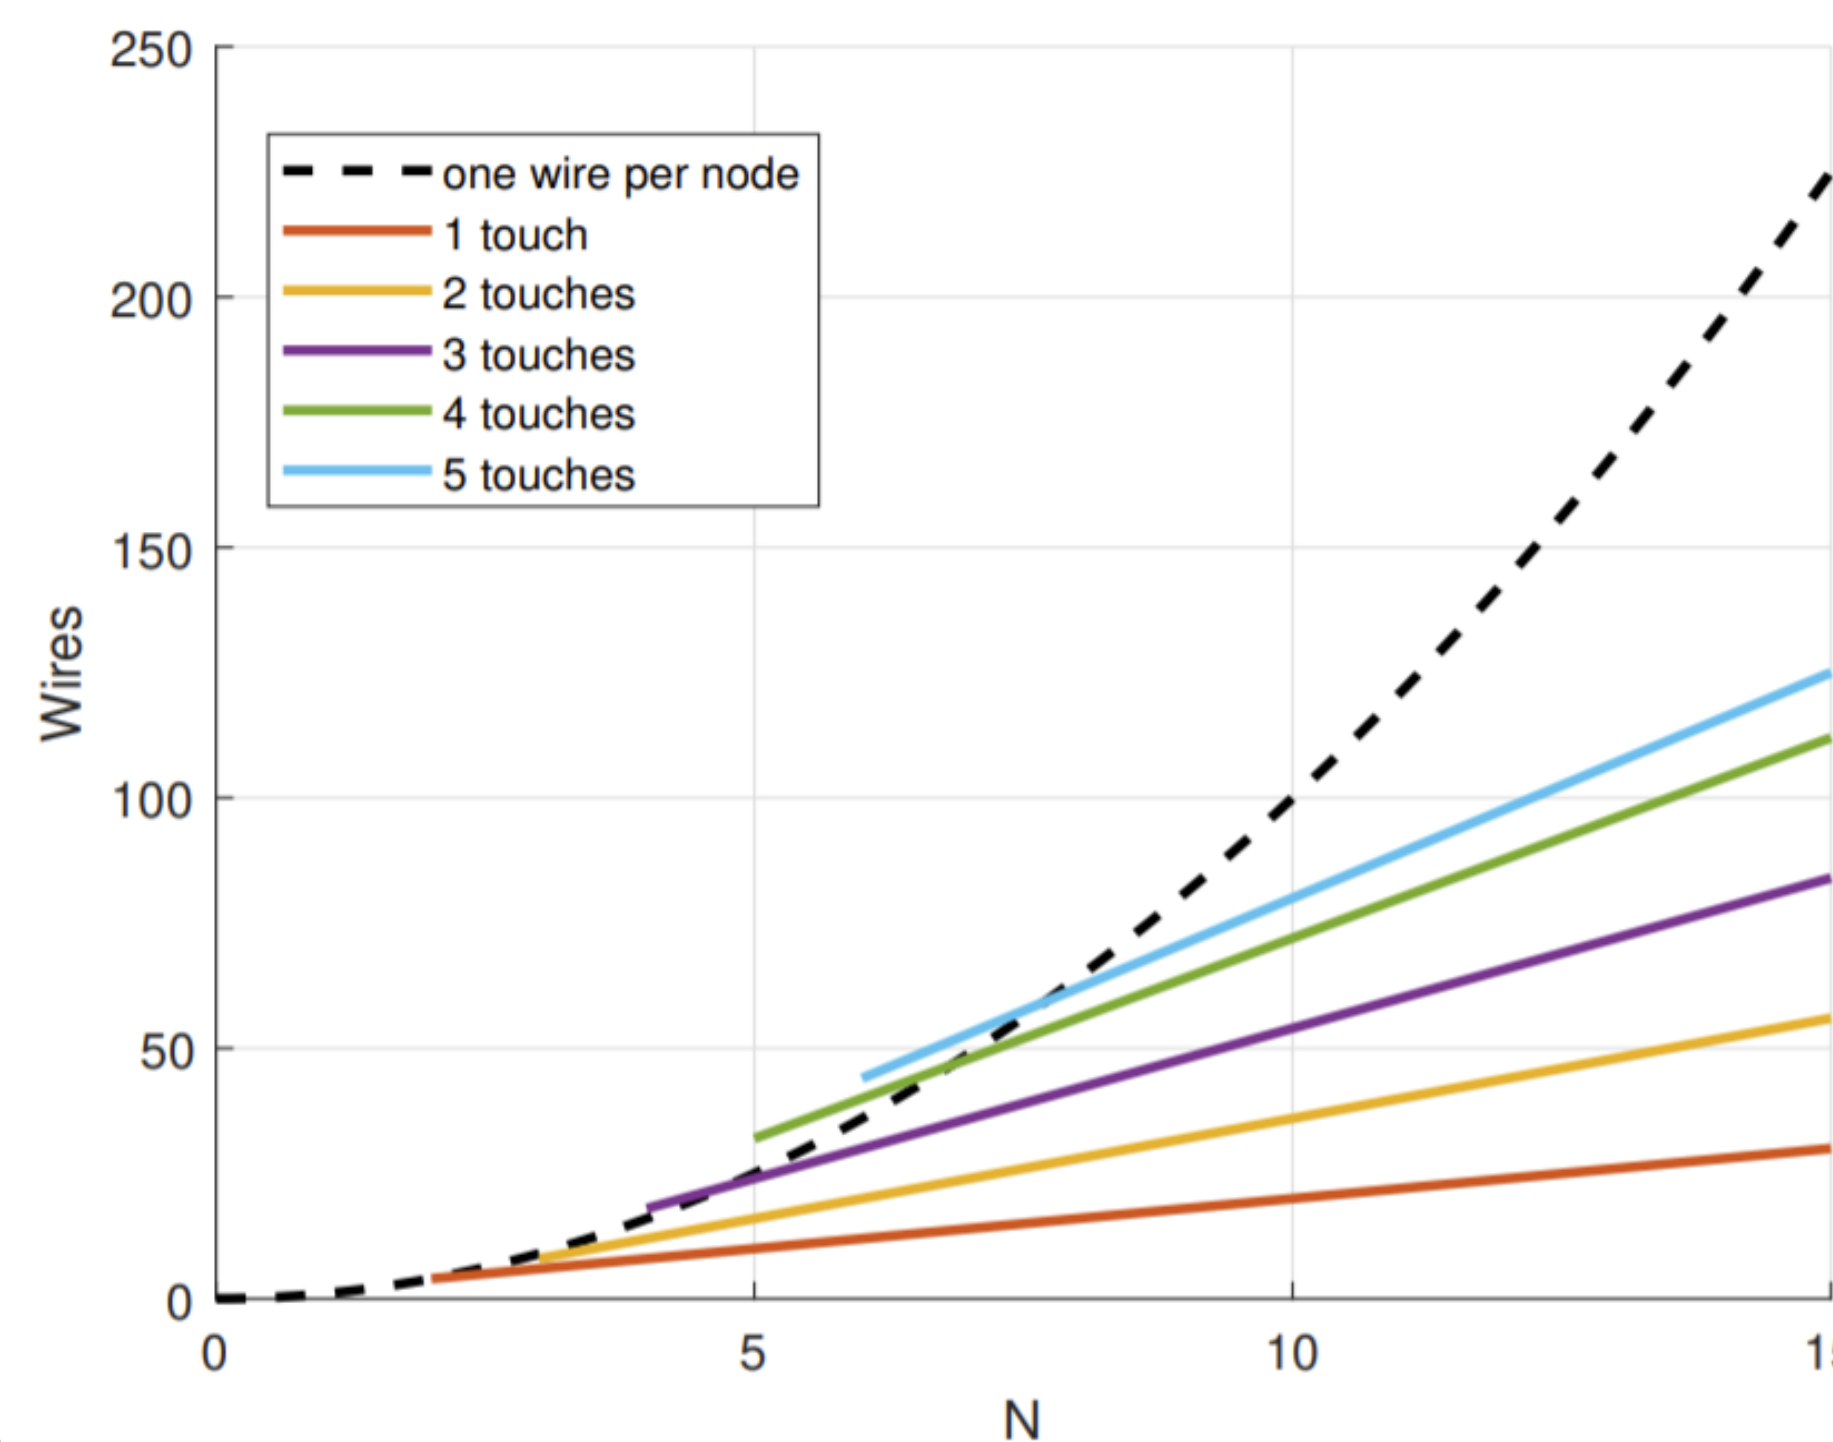

Suitable architectures for (A) one, (B) two and (C) three simultaneously detectable points

We introduce a smart design methodology for grid-based soft touch sensors that allows the simultaneous detection of up to a finite number of points thanks to the introduction of diagonal grids

Motivation


Soft strain sensors have been widely used for the development of electronic skins for both robotic and wearable applications^[1,2]. To sense contact location on a wide surface, the standard methodology consists of square grids that are able to detect single contact points but fail to detect multiple ones simultaneously^[3,4]. To avoid such a problem, state-of-the-art technologies implement sequential samp-

ling that isolates each sensing node, but at the cost of a lower sampling rate^[5,6]. This theoretical study proposes a design methodology for multi-touch detection for parallel processed grid-based strain sensors. The fundamental idea is to add diagonal grids of varying orientations on top of the standard architecture to achieve multi-touch detection. The maximum number of detectable points, the number of required strain fibers and the overall geometry of the

sensor are studied along with the error introduced when trying to sense more contact points than designed for. We also provide metrics to evaluate the performance of any given architecture. Overall, compared with state-of-the-art design methodologies, our work provides a guideline for more efficient grid-based architectures that are able to simultaneously detect up to a fixed finite number of contact points.

Error estimation

For a given architecture, when trying to detect a number of points $P > P_{max}$ some errors are introduced. To estimate the quantitative value of these errors, all the combinations of points that cannot be uniquely mapped to a single combination of touched nodes are computed. We report such results in the case of square grids of different sizes.

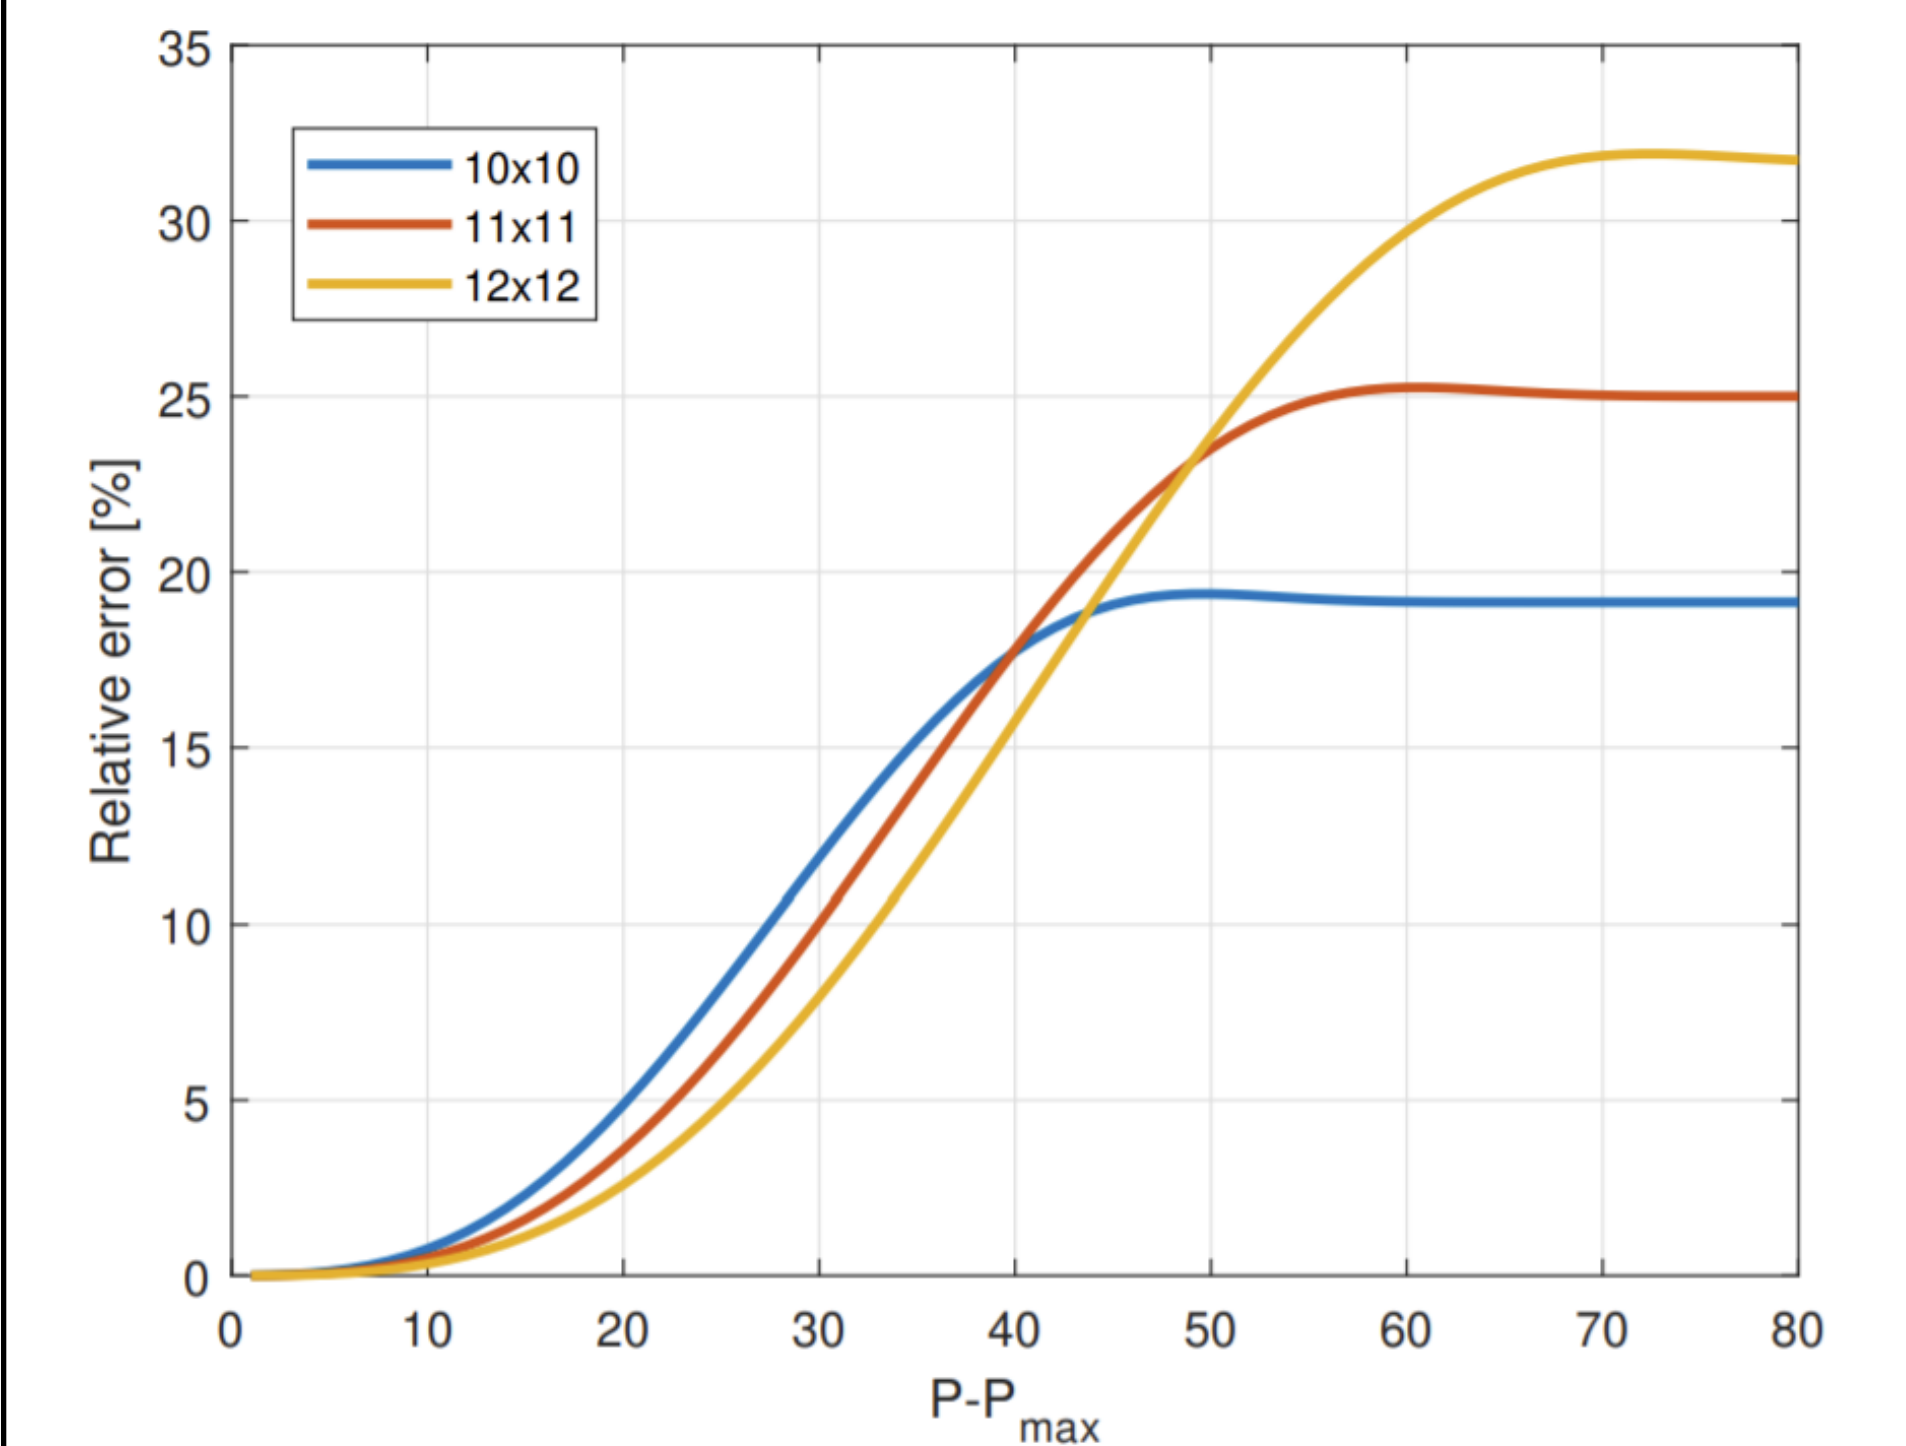

At first, the relative error increases as P increases since the number of undetectable combinations increases every time a new point is added. Then, the error stabilizes because the number of all possible combinations out-scales the number of wrong ones. The asymptotic value and the increasing rate are strongly dependent on the size of the grid.

References

- [1] B. Shih, D. Shah, J. Li, T. G. Thuruthel, Y.-L. Park, F. Iida, Z. Bao, R. Kramer-Bottiglio, and M. T. Tolley, "Electronic skins and machine learning for intelligent soft robots," *Science Robotics*, vol. 5, no. 41, 2020.
- [2] D. Chen and Q. Pei, "Electronic muscles and skins: a review of soft sensors and actuators," *Chemical reviews*, vol. 117, no. 17, pp. 11 239–11 268, 2017.
- [3] . Wang, M. Totaro, and L. Beccai, "Toward perceptive soft robots: Progress and challenges," *Advanced Science*, vol. 5, no. 9, p. 1800541, 2018.

- [4] . G. Thuruthel, B. Shih, C. Laschi, and M. T. Tolley, "Soft robot perception using embedded soft sensors and recurrent neural networks," *Science Robotics*, vol. 4, no. 26, 2019.
- [5] H. Shi, M. Al-Rubaiai, C. M. Holbrook, J. Miao, T. Pinto, C. Wang, and X. Tan, "Screen-printed soft capacitive sensors for spatial map-ping of both positive and negative pressures," *Advanced Functional Materials*, vol. 29, no. 23, p. 1809116, 2019.
- [6] C. Larson, J. Spjut, R. Knepper, and R. Shepherd, "A deformable interface for human touch recognition using stretchable carbon nanotube dielectric elastomer sensors and deep neural networks," *Soft robotics*, vol. 6, no. 5, pp. 611–620, 2019.

Acknowledgement

This work was supported by the SHERO project, a Future and Emerging Technologies (FET) program of the European Commission (grant agreement ID 828818), and the SMART project, European Union's Horizon 2020 research and innovation under the Marie Skłodowska-Curie (grant agreement ID 860108).